


PRIMO-SA STARTER

Double Sided Self-Adhesive Roof Starter

Description:

PRIMO-TAPE is an SBS-modified, double-sided self-adhesive tape, designed to improve the initial stages of roofing installation. Positioned around the eaves of buildings, PRIMO-Tape acts as a robust starter tape, offering a high-performance alternative to traditional starter shingles. It is particularly effective in creating a secure base for subsequent ice and water shields, ensuring a watertight bond from the outset.

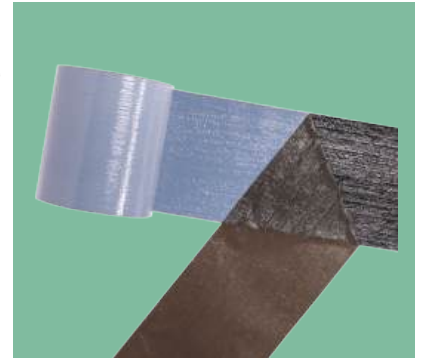

Features:

- Double-sided, extra-tacky adhesive ensures a robust seal between the drip-edge and underlayment.
- excellent adhesion to multiple substrates.
- high flexibility.
- good dimensional stability.
- puncture-resistant.

Uses:

PRIMO-TAPE is an easy-to-use alternative to traditional starter shingles.

PHYSICAL PROPERTIES:

Dimensions:	0.22x20m 8.5" x 65'
Nominal Thickness:	1.2 mm 48 mils
Nominal Weight:	26.5 kg 58 lbs
Rolls / Box	4 Rolls

Boxes / Pallet	30
Top Surface:	Self Release Film
Bottom Surface:	Split Release Film

PRIMO-SA STARTER

Double Sided Self-Adhesive Roof Starter

TEST RESULTS		
Test Property	Result	Test Method
Softening Point	> 115°C	ASTM D36
Maximum Load (L, T)	4.4 KN / m	ASTM D2523
Elongation at Break (L, T)	10%	ASTM D2523
Adhesion to Plywood 4°C, min	0.92 kg / 30.5 cm	ASTM D903
Adhesion to Plywood 23°C, min	5.44 kg / 30.5 cm	ASTM D903
Thermal Stability	3 mm	ASTM D1204
Flexibility Temperature	-29°C (-20 F)	ASTM D1970
Tear Resistance (L, T)	89 N	ASTM D4073
Waterproof Integrity of Lap Seam	Pass	ASTM D1970
Sealability Around Nail	Pass	ASTM D7349
Moisture Vapour Permeance, max	5.7 ng / Pa.S.M ²	ASTM E96
Slip Resistance	Pass	ASTM D1970

STATEMENT OF RESPONSIBILITY:

This Technical Data is the average result of tests, measurements, and trials carried out by LAMA's own laboratory in accordance to international standards such as ASTM, BS, and UEAtc. acceptable deviation according to UEAtc. Nothing contained within the technical tables is represented by a warranty or guarantee for which LAMA can be held legally responsible.

This product data sheet supersedes all previous data publications pertaining to this product. This data may be changed, improved, or modified by LAMA, in accordance with the client's requirements, and availability of raw materials, without advance notice.